

Mini cold room BS1240L



Description

BS1240L mini cold room with built-in refrigeration unit, 1240 litres, 2–10 °C, PVC-coated steel housing. Panic lock, aluminium interior cladding, stainless steel floor. Prepared for support rails, grates and access ramp. For restaurants and catering businesses requiring their own cold storage space.

Features

• Power load:	0.571 kW 230 V 50 Hz
• Temperature range:	2 °C to 10 °C
• Temperature control:	Digital
• Control unit:	Electronic Knob
• Content:	1240 litre(s)
• Size inside:	W 820 x D 860 x H 1760 mm
• Door hinge side can be changed:	Yes
• Control lamp:	yes
• Door hinge side:	Right
• Climate class:	4
	This appliance is intended for use in ambient temperatures up to 30 °C.
• Cooling:	Compressor
• Coolant:	R290 / 0,130 kg
• Digital display:	Yes
• Interior lighting:	No
• Insulation:	Polyurethane, 60 mm

► Continue on the next page



- Cold store
 - ✓ Content: 1240 litres
 - ✓ Dimensions: W 855 x D 900 x H 1760 mm



- Prepared for:
 - ✓ Bearing rails
 - ✓ Grilles
 - ✓ Suspension device
 - ✓ Access ramp



- Door
 - ✓ With a panic lock
 - ✓ Lockable
 - ✓ Door hinge side can be changed

- Design
 - ✓ Building kit - simple assembly

Mini cold room BS1240L

- | | |
|----------------------------------|--|
| • Delivery state: | Building kit (simple assembly) |
| • Type of door: | Leaf door(s) |
| • Automatic defrosting function: | Yes |
| • Drip water evaporation: | Yes |
| • ON/OFF switch: | Yes |
| • Lockable: | Yes |
| • Properties: | Panic lock |
| | Prepared for bearing rails, grilles, suspension device, access ramp to 30 °C |
| • Ambient temperature: | Yes |
| • Thermostat: | Yes |
| • Not included in delivery: | Bearing rails, grilles, suspension device, access ramp |
| • Material inside: | Aluminium |
| | Stainless steel base |
| • Material: | Steel plate |
| | PVC coated |
| • Important information: | - |
| • Size: | W 980 x D 1,040 x H 2,200 mm |
| • Weight: | 158.2 kg |



Mini cold room BS1240L

Add on Products

Suspension attachment

STAINLESS
STEEL




- Set comprises: 2 bearing rails
1 suspended tube (can be adjusted horizontally in 5 positions)
- Load-bearing capacity max.: 150 kg
- Size tube: Ø 30 mm | Length: 830 mm
- Length bearing rail: 850 mm
- Clearance from floor: 1700 mm

Code-No. 700595
GTIN 4015613630397

Thermometer A250

STAINLESS
STEEL

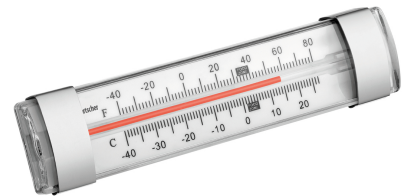

- Design: Analogue
- Size of display field: W 98 x H 28 mm
- With temperature sensor: No
- Designed for: Refrigerators / upright freezers
Temperature monitoring during transport and storage

Code-No. 292043
GTIN 4015613664279

Support rails

STAINLESS
STEEL



- Distance between trays: 200 mm
- Set comprises: 4 bearing rails
- Number of drawers: 8
- Material: Stainless steel
- Important information: 4 bearing rails are required for the mini cooling cell
- Size: W 1,500 x D 40 x H 25 mm

Code-No. 700593
GTIN 4015613680019

Loading ramp

STAINLESS
STEEL



- Load-bearing capacity max.: 130 kg
- Material: Stainless steel
- Important information: -
- Size: W 850 x D 195 x H 35 mm
- Weight: 1.6 kg

Code-No. 700597
GTIN 4015613630410

Mini cold room BS1240L

Add on Products

Infrared thermometer D5500



- Design: Digital
- Size of display field: W 24 x H 23 mm
- With temperature sensor: No
- Designed for: Surface temperature measurements (infrared)
Temperature monitoring during transport and storage

Code-No. 292059
GTIN 4015613885797

Thermometer A500



- Design: Analogue
- Size of display field: Ø 45 mm
- With temperature sensor: No
- Designed for: Room temperature measurements
Refrigerators / upright freezers
Temperature monitoring during transport and storage

Code-No. 292049
GTIN 4015613664286

Thermometer A300

STAINLESS
STEEL



- Design: Analogue
- Size of display field: Ø 45 mm
- With temperature sensor: No
- Designed for: Room temperature measurements
Refrigerators / upright freezers
Temperature monitoring during transport and storage

Code-No. 292048
GTIN 4015613664262