

2Z 38FL



700130

Bartscher GmbH
Franz-Kleine-Str. 28
D-33154 Salzkotten
Germany

Phone: +49 5258 971-0

Fax: +49 5258 971-120

Technical Support Hotline: +49 5258 971-197

www.bartscher.com



Version: 2.0

Date of preparation: 2025-04-22

Original instruction manual

1	Safety	2
1.1	Explanation of Signal Words.....	2
1.2	Safety instructions.....	3
1.3	Intended Use	6
1.4	Unintended Use	6
2	General information	7
2.1	Liability and Warranty	7
2.2	Copyright Protection	7
2.3	Declaration of Conformity	7
3	Transport, Packaging and Storage	8
3.1	Delivery Check.....	8
3.2	Packaging	8
3.3	Storage	8
4	Technical Data.....	9
4.1	Technical Specifications	9
4.2	List of Components of the Appliance	11
4.3	Functions of the Appliance.....	12
5	Installation and operation	12
5.1	Installation.....	12
5.2	Operation	15
6	Cleaning and Maintenance	17
6.1	Safety Instructions for Cleaning	17
6.2	Cleaning.....	18
6.3	Maintenance	19
7	Possible Malfunctions.....	20
8	Disposal.....	22



Read these instruction manual before using the appliance and keep it available at all times!

This instruction manual contains information about installation, operation and maintenance of the appliance and constitutes an important source of information and reference guide. The knowledge of all operational and safety instructions included in this manual is a prerequisite for safe and proper handling of the appliance.

Read this instruction manual before you use the appliance and particularly before you start the appliance to prevent injury or damage. Incorrect use may cause damage.

All important information contained in the operating instructions must be available to the appropriate staff at all time. The operator shall be responsible for their availability.

In addition to the operating instructions, you must comply with the general, legal and other applicable regulations for occupational safety and environmental protection.

EN

1 Safety

This appliance has been manufactured in accordance with technical standards currently in force. However, the appliance may be a source of hazards if used improperly or contrary to its intended purpose. All persons using the appliance must consider information included in this instruction manual and observe safety instructions.

1.1 Explanation of Signal Words

Important safety instructions and warning information are indicated in this instruction manual with appropriate signal words. You must strictly follow the instructions, to prevent accidents, personal injuries and property damages.



DANGER!

The signal word **DANGER** warns against hazards that lead to severe injuries or death if the hazards are not avoided.



WARNING!

The signal word **WARNING** warns against hazards that may lead to moderate or severe injuries or death if the hazards are not avoided.



CAUTION!

The signal word **CAUTION** warns against hazards that may lead to light or moderate injuries if the hazards are not avoided.

IMPORTANT!

The signal word **IMPORTANT** indicates possible property damages, which may occur if safety instructions are not observed.

NOTE!

The symbol **NOTE** indicates subsequent information and guidelines for the user on usage of the appliance.

1.2 Safety instructions

Electrical Current

- Too high a mains voltage or incorrect installation may cause electric shock.
- The appliance may be connected only if data on the rating plate correspond with the mains voltage.
- To avoid short-circuit, the appliance should be kept dry.
- If there are malfunctions during operation, disconnect the appliance from the power supply.
- Do not touch the appliance's plug with wet hands.
- Never take hold of the appliance if it has fallen into water. Immediately disconnect the appliance from the power supply.
- Any repairs or housing opening may be carried out by professionals and relevant workshops only.
- Do not transport the appliance, holding it by the power cord.
- Do not allow the power cord to come into contact with heat sources or sharp edges.

- Do not bend, pinch nor knot the power cord.
- Always completely unwind the power cord.
- Never place the appliance or other objects on the power cord.
- Always take hold of the plug to disconnect the appliance from the power supply.
- Check the power cord regularly for damage. Do not use the appliance if the power cord is damaged. If this cable is damaged, it must be replaced by customer service or a qualified electrician in order to avoid dangers.

Fire hazard / flammable materials hazard / explosion hazard!

- Do not use any electric devices in the appliance.
- Do not store nor use petrol or other flammable liquids and gases in the vicinity of this or any other appliance. Those gases may cause fire or explosion hazard.
- Do not put into the appliance any explosive materials, like sprays filled with flammable propellants. Contents of containers filled with flammable gases and liquids may leak in low temperatures, and the contents may catch fire from sparks generated by an electric appliance. Explosion hazard!
- In the case of coolant leakage, pull the plug from the socket. Remove all sources of ignition in the vicinity, ventilate room and contact technical service. Avoid coolant getting in contact with eyes, as it may cause serious eye damage.
- Never use any flammable liquids for cleaning the appliance or its parts. Gases released may cause fire or explosion hazard.
- In the case of fire, disconnect the appliance from the power supply before attempting adequate fire-extinguishing actions.
- Never attempt to extinguish fire with water if the appliance is connected to the power supply. Following extinction of fire, ensure sufficient fresh air inflow.
- Defrosting process may not be sped up with mechanical means or heat energy sources (candles or heaters) nor with any other means. Vapour produced may cause short-circuit and too high temperatures may damage the appliance.
- All ventilation slots should not be obstructed during operation.
- Never attempt to damage cooling installation of the appliance.

Operator's responsibility

The operator is responsible for complying with the currently applicable laws, regulations, ordinances and existing national regulations on accident prevention, environmental protection, as well as the internal operation, operating and safety instructions that apply at the respective installation site.

Obligations of the operator:

- Operate the appliance and its components only in a technical condition that does not raise any objections, with functional protective and safety elements.
- Prepare risk assessment at work positions.
- Provide instruction and regular staff training. Pay special attention to and observe the section concerning safety and any safety hints.
- Provide suitable personal protective equipment (PPE)
- Observe the intervals of maintenance and cleaning.
- Document training/instructions, replacement of components.

Operating Personnel

- The appliance may only be operated by qualified personnel and trained specialist personnel.
- This appliance may not be operated by persons (including children) with limited physical, sensory or mental capabilities, nor by persons with limited experience and/or limited knowledge.
- Children should be supervised to ensure that they are not playing with or switching on the appliance.

EN

Improper Use

- Unintended or prohibited use may cause damage to the appliance.
- The appliance may only be used when its technical condition is flawless and allows for safe operation.
- The appliance may only be used when all connections are executed according to rules of law in force.
- The appliance may only be used when it is clean.
- Use only original spare parts. Never attempt to repair the appliance on your own.
- Do not introduce any changes in the appliance nor modify it.

- Do not drill hole in the appliance nor install any objects on it.
- Do not place any heavy objects on the appliance.

1.3 Intended Use

This appliance is only intended for use described in the operating instructions, with the supplied and approved components.

Any other use is considered against the intended purpose. The manufacturer shall not be liable for any damage due to unintended use. In such cases the responsible party shall only be the user/operator.

The following is an intended purpose:

- Cooling bottled wine.

1.4 Unintended Use

An unintended use may lead to personal injuries or property damages caused by hazardous voltage, fire or high temperature. The appliance may only be used to perform tasks described in this instruction manual.

The following is an unintended use:

- Storing flammable or explosive objects and liquids, such as ether, petroleum or adhesives;
- Storing explosive materials, like sprays filled with flammable propellants;
- Storing pharmaceutical products or preserved blood;
- Storing live pets.

2 General information

2.1 Liability and Warranty

The appliance was built in accordance with the current state of the art and recognized technical safety principles. Nevertheless, during its use, there may be a threat to the health and life of the user or bystanders, or the danger of damage to the device or other assets. Warranty and liability claims for personal injury/property damage as well as defects at work are excluded if they can be attributed to one or more of the following causes:

- Use against the intended purpose
- Failure to follow/disregard the instructions and all related information
- Unauthorized structural or technical changes to the device
- Engaging insufficiently trained and insufficiently qualified personnel
- Operation with defective or incorrectly installed safety and protective devices
- Inadequate maintenance or cleaning
- Faults not fixed
- Use of prohibited media, cleaning agents, etc.
- Use of unauthorised spare parts
- Errors in operation or other misuse
- Disasters caused by foreign objects or force majeure
- Destruction of the type plate and stickers relevant for operation and safety

The warranty period for this appliance is 24 months, counted from the purchase date.

EN

2.2 Copyright Protection

This instruction manual, and texts, drawings and images included in it, as well as its other components are copyright protected. It is prohibited to reproduce this instruction manual (including its excerpts), in any form and by any means, and to use and/or transfer its content to third parties without manufacturer's written permission. Violation of the above results in obligation to pay compensation. We reserve the right to claim further damages.

2.3 Declaration of Conformity

The appliance meets the currently applicable standards and guidelines of the European Union. We confirm the above in the EC Declaration of Conformity. We may provide relevant Declaration of Conformity upon request.

3 Transport, Packaging and Storage

3.1 Delivery Check

Immediately upon reception, check the delivery for completeness and possible shipping damage. In the case of visible transport damage refuse to accept the appliance or accept it conditionally. Mark and note the scope of damage in shipping documents/consignment list of the shipping company and lodge a complaint. Concealed damage must be reported immediately upon its discovery, as compensation claims may only be filed within applicable time limits.

If you find that parts or accessories missing, please contact our Customer Service Department.

3.2 Packaging

Do not dispose of the appliance cardboard box. It may be used to store the appliance when relocating or when shipping the appliance to our service point in the case of any damages.

The packaging and its elements are made of recyclable materials. Particularly, these are: plastic films and bags, cardboard box.

EN

When disposing of the packaging, observe applicable domestic regulations. Recyclable packaging materials should be recycled.

3.3 Storage

Leave the packaging closed until installation of the appliance; observe external indications concerning method of placing and storage. Store the packaging in the following conditions only:

- in closed rooms;
- in dry and dust-free surrounding;
- away from aggressive agents;
- in a location protected against sunlight;
- in a location protected against mechanical shocks.

In the case of extended storage (over three months), make sure you check the condition of the packaging and the parts regularly. If needed, replace the packaging with a new one.

4 Technical Data

4.1 Technical Specifications

Name:	Wine cooler 2Z 38FL
Art. No.:	700130
Material:	steel, painted; glass
Material interior:	steel
Total volume (top/bottom), in litres:	113 (48 / 65)
Total volume of bottles (top/bottom):	38 (15 / 23)
Number of temperature zones:	2
Temperature range, top, min.–max., in °C:	5 - 20
Temperature range, bottom, min.–max., in °C:	5 - 20
Amount of coolant, in kg:	R600a / 0,038
Ambient temperature, max., in °C:	16 - 38
Climate class:	ST
Energy consumption, in kWh/year:	146
Energy efficiency class:	G (EU Nr. 2019 / 2016)
Number of shelves, top/bottom:	3 / 4
Shelf dimensions (W x D), in mm:	1x 305 x 328 6x 296 x 438
Connected load:	0,15 kW 220-240 V 50 Hz
Dimensions (W x D x H), in mm:	396 x 580 x 1.030
Weight, in kg:	40,0

EN

We reserve the right to implement technical modifications.


Version / Characteristics

- Cooling: compressor
- Insulation: thermal
- Control:
 - touch
 - electronic
- Automatic defrost function
- Evaporation of condensed water
- Thermostat
- Fan: active
- Digital display
- ON/OFF switch
- Door type: leaf door, glass
- Right-hand side door, with no possibility for door hinge to be changed
- Type of glazing:
 - double glazing
 - insulating safety glass with UV filter
- Type of shelves:
 - wooden shelves, on ball bearings
 - outreach: 225 mm
- Lighting:
 - LED
 - can be switched separately per each temperature zone
- Features:
 - Vibration-dampened feet for quiet operation
 - Ergonomic handle
- Appliance locked with a key
- Can be flush-mounted: no

EN

More information on the appliance is available in our website www.bartscher.com or, pursuant to the Regulation (EU) 2019/2016, in our product data base at <https://energy-label.ec.europa.eu/>. Enter article number for a given model.

4.2 List of Components of the Appliance

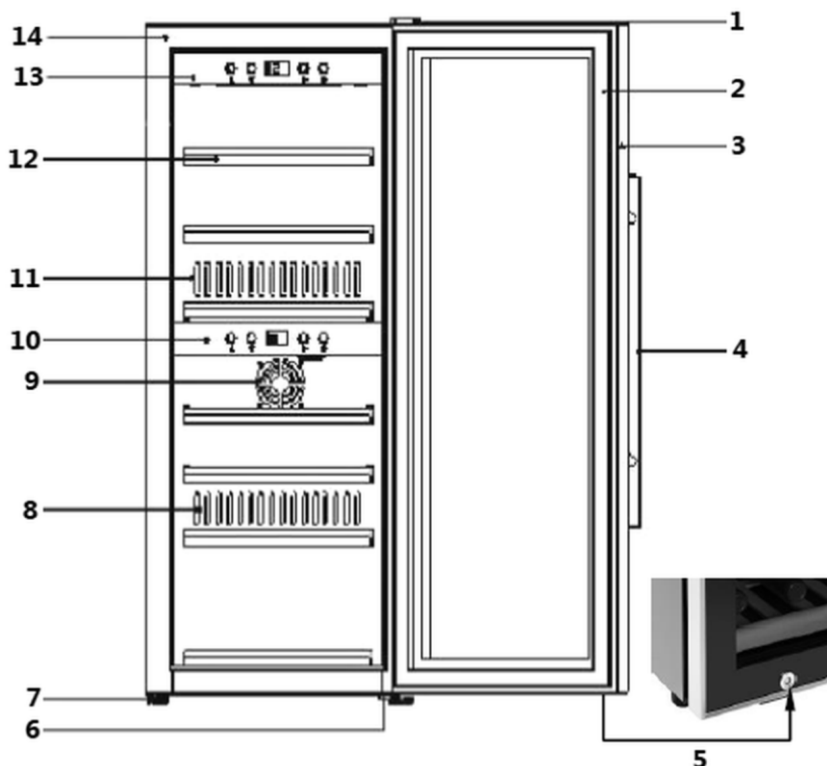

- | | |
|--------------------------|-------------------------------------|
| 1. Upper hinge cover | 2. Door seal |
| 3. Door frame (lockable) | 4. Door handle |
| 5. Lock | 6. Lower hinge with foot adjustment |
| 7. Feet (3x) | 8. Hot air outlet |
| 9. Air inlet | 10. Lower control panel |
| 11. Cold air outlet | 12. Wooden shelf (7x) |
| 13. Top control panel | 14. Housing |

4.3 Functions of the Appliance

The appliance is designed for cooling and storage of bottles of wine in restaurants and bars.

Individually adjustable temperature zones and glass pane with UV filter provide for optimum storage and presentation of white and red wine.

5 Installation and operation

5.1 Installation

Unpacking / Positioning

- Unpack the appliance, remove all external and internal packaging elements and shipment safeguards.



CAUTION!

Choking hazard!

Prevent children from accessing packaging materials, for instance: plastic bags and EPS elements.

EN

- If the appliance is covered with a protective film, remove it. Remove the film slowly, so no glue residues are left. Remove any glue residues with the use of a suitable solvent.
- Be careful not to damage the rating plate and warning labels affixed to the appliance.
- **Never** place the appliance in humid or wet environment.
- Place the appliance in a way making the connections easily accessible, so that they may be quickly disconnected if such a need arises.
- When selecting the installation site, please consider the following items:
 - The mounting surface must be even, sufficiently load-bearing, waterproof, dry and resistant to high temperatures.
 - Make sure that the designated escape routes are clear.
 - Ensure a stable position.
 - Allow sufficient space for work, maintenance and cleaning.
 - Leave the supply and exhaust air vents, if any, free.
 - Comply with applicable technical and building regulations.
- Do not place the appliance in direct sunlight or in the vicinity of heat sources (cooker, radiator, heating devices, etc.). Heat sources may negatively affect power consumption, and restrict functions of the appliance, too.

Installation and operation

- Place the appliance so that sufficient air circulation is ensured. Do not block nor cover ventilation openings in the rear wall of the appliance.
- Leave at least 10 cm clearance from walls and other objects.
- Do not position the appliance in high humidity locations. Excessive humidity may cause rust and negatively influence the refrigerating efficiency of the device.
- The appliance should be installed only in rooms, in which ambient temperature falls within the range of 16 °C – 38 °C.
- In order to avoid damage to the compressor, do not tilt the appliance more than 45° when positioning or transporting it.

Fixing of Door Handle

1. Before the first use, fix the supplied stainless steel handle to the appliance door.
2. Move the rubber seal on the door internal side left or right to uncover the fixing holes.
3. Fix the handle to door with enclosed screws.
4. Then replace the seal in correct position.





Fig. 1

EN

- The appliance is delivered with 3 large feet and one height-adjustable foot. Adjust the small foot to make the appliance stand straight and do not sway.

Wooden Shelves

Place the bottles depending on the size and type of bottle.

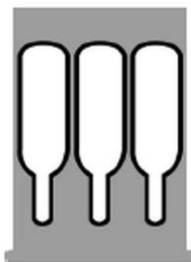

Intermediate shelf



Lower shelf

Each wooden shelf may be removed to allow for, e.g., the storage of larger bottles.

1. First, take bottles off of the wooden shelf.
2. Then, lift the wooden shelf slightly and pull it out (loosen the screws prior, should it be required).

NOTE!

Make sure that the wooden shelves are properly snapped before placing bottles on them. Pay attention to uniform distribution of load inside the appliance.

EN

Power supply connection

- Verify if technical data of the appliance (see rating plate) correspond with the local electric power grid specification.
- Connect the appliance to a single, properly grounded mains socket with protective contact. Do not connect the appliance to a multi-socket.
- The power cord should be laid in a way preventing anyone from threading on it or tripping against it.
- Prior to first use, the appliance should be installed and left standing upright for at least 12 hours, before it is connected to power supply.
- After a power failure or when the plug is removed from the socket, do not reconnect the appliance to power supply for at least 15 minutes.

5.2 Operation

Before the First Use

1. Before the first use, clean the appliance inside and outside, as well as accessories, using luke-warm water and a soft cloth. Additionally, follow instructions in section 6 '**Cleaning**'.
2. To end with, dry the appliance and accessories thoroughly.
3. insert wooden shelves into the appliance.

Control Elements and Display



A



Temperature increase button



Temperature decrease button

A

Digital display



Internal LED lighting button



ON/OFF button

EN

Appliance Start-up

1. Plug the appliance into a suitable single socket.

The temperature zones of the wine cooler are controlled independently with use of control elements.

2. Press the ON/OFF button in the top control panel.

The appliance and the top temperature zone will be switched on.

3. Press the ON/OFF button in the bottom control panel.

The bottom temperature zone will be switched on.

Digital displays show current internal temperature for a given temperature zone.

Settings

The  and  buttons make it possible to set the temperature between 5°C and 20°C in top and bottom temperature zone.

Our recommended temperature settings:

- for white wine: 6 °C – 10 °C
- for red wine 12 °C – 18 °C

1. In case of using both temperature zones, temperature in the top zone should be lower than in the bottom zone.
2. If only one zone is to be used, disconnect the bottom temperature zone with the ON/OFF button in the bottom control panel.
3. Wait until the appliance reaches the pre-set temperature and put the wine bottles inside.

NOTE:

Keep in mind that in the case of maximum load of the appliance chambers it must work longer to reach the pre-set temperature.

EN

4. By pressing two buttons —  and  — simultaneously for 5 seconds, it is possible to switch between °C and °F.
5. With the use of  and  buttons it is possible to adjust temperature every 1°C.

Temperature in the appliance depends on surrounding temperature, number of stored bottles, and pre-set temperature.

Moreover the appliance is equipped with heating, thus in the case of lower ambient temperatures, the appliance may maintain wine temperature at desired level.

Internal LED Lighting

The internal LED lighting may be switched on and off independently for each chamber. The LED lamp is located at a ceiling of each chamber.

1. To switch the internal LED lighting on or off, press the  button in the respective control panel.



Switching the Appliance Off

1. When the appliance is no longer used, switch it off using ON/OFF button on both control panels and then disconnect it from power supply (pull the plug out).

6 Cleaning and Maintenance

The operator must ensure that the device and its safety components are kept in good condition. Control and safety systems should be checked for their effectiveness.

Maintenance, cleaning and repairs must only be carried out by suitably trained and specialised personnel.

If the safety devices need to be removed for maintenance, cleaning and repair, they should be reinstalled immediately after completion and their function should be checked.

All maintenance and cleaning work must be carried out in accordance with the operating instructions at the specified intervals.

6.1 Safety Instructions for Cleaning

- Before cleaning, disconnect the appliance from the power supply.
- Leave the appliance to cool down completely.
- Make sure water does not enter the appliance. Do not immerse the appliance in water or other liquids during cleaning. Do not clean the appliance with a pressurized water jet.
- Do not use any sharp or pointed, nor metal implements (knife, fork, etc.). Sharp or pointed implements may damage the appliance, and when in contact with live parts, they may cause electric shock.
- For cleaning, do not use any scouring agents that contain solvents nor corrosive cleaning agents. They may damage the surface.

6.2 Cleaning

1. Clean the appliance regularly.
2. Before cleaning, remove bottles of wine from the appliance and store them temporarily in a cool room.
3. Pay attention to the following instructions for cleaning individual elements.

Appliance Interior

1. Clean the appliance interior with warm water, using gentle washing agent and a soft cloth.
2. Clean the wooden shelves with a soft, damp cloth. Remove them if necessary.
3. Then dry the cleaned surfaces thoroughly using a soft cloth.

Door Seal

1. Clean the door seal with a soft, damp cloth.
2. In order to assure correct closing and operation of the appliance, make sure that the door seal is clean.

EN

Housing

1. Clean the appliance exterior with a soft cloth, soaked in warm water and a gentle cleaning agent.
2. Then dry the appliance thoroughly with a soft cloth.

6.3 Maintenance

Extraction Opening/Fan

The cooling efficiency may be reduced due to accumulation of dust or other contaminants blocking the extraction openings.

1. Vacuum the extraction opening if necessary.

Condensate Tank (K)

1. Using a sponge, remove the condensed water from the condensate tank (K) regularly.

The condensate tank (K) is located at the rear wall of the appliance, bottom right.



Manual Defrosting

1. The appliance should be defrosted at least every half a year.

ATTENTION!

When the appliance door is often opened, defrosting should be performed more frequently.

2. Turn the appliance off and remove the plug from the socket.
3. Then start the manual defrosting.
4. Monitor the condensate tank (K) and remove the water accumulating during the defrosting process.

7 Possible Malfunctions

The table below contains descriptions of possible causes and solutions to malfunctions or errors during operation of the appliance. The works may only be performed by suitably qualified technical personnel.

When malfunction cannot be removed, contact the technical service. In such a case, provide article number, model and serial number. You will find this information on the rating plate.

Error	Possible Cause	Solution
The appliance does not work.	Incorrectly connected plug.	Remove the plug and insert it properly into the socket.
	Electric power supply safety fuse damaged.	Check the fuse, connect the appliance to another socket.
	No power supply.	Check electric power supply.
	Damaged socket.	Plug the appliance into another socket.
	Damaged mains power plug.	Contact the service company.
Insufficient cooling power; the appliance does not reach pre-set temperature.	Temperature set incorrectly.	Check the set temperature and change it if needed.
	Door is not closed properly or it has been opened for too long.	Close the door tightly; limit the door opening time to minimum.
	Damaged or deformed door seal.	Contact the service company.
	Poor air circulation around the appliance.	Keep sufficient distance from walls or other objects.
	Ambient temperature too high.	Ambient temperature in installation place should be in the range of 16°C – 38°C.

Possible Malfunctions

Error	Possible Cause	Solution
Appliance is vibrating.	The appliance is not placed on even surface.	Place the appliance on even surface.
Appliance operates too loudly.	Loose elements (e.g. nuts/screws).	Check all screws and nuts, tighten them if necessary.
	The appliance is not placed on even surface.	Place the appliance on even surface.
	Appliance touches walls or other objects.	Keep sufficient distance from walls or other objects.
Door fails to close properly.	The appliance is not placed on even surface.	Place the appliance on even surface.
	Door was fixed incorrectly.	Contact the service company.
	Worn door seal.	Contact the service company.
	Wooden shelves slide off or are incorrectly set.	Fix the wooden shelves correctly in the internal chamber.
Digital display shows no indications.	Temperature controller is damaged.	Contact the service company.
	Damaged mains power plug.	
Digital display shows 'Lo'.	Problem in the printed circuit.	Contact the service company.
Buttons are not working.	Temperature controller is damaged.	Contact the service company.
Compressor does not start.	Room temperature is lower than the set temperature.	Maintain temperature in the installation location.

Error	Possible Cause	Solution
Dew on the appliance's surface.	Air humidity in installation location is too high.	Remove dew using a soft cloth.
Condensate in the cooler.	Appliance door was open for a longer period or they are opened too frequently.	Keep them closed as long as possible.
E2 error.		Contact the service company.

The following phenomena are not malfunctions:

Various sounds that are generated by the appliance during operation are a normal phenomenon and do not indicate any malfunctions.

- Splashing, bubbling and hums are generated by the coolant that circulates the system.
- Short, louder whirring/hooting or clicking sounds may be heard when the compressor of the appliance starts for the pre-set temperature of the appliance internal chamber be restored.

EN

8 Disposal

Electrical Appliance

	Electric appliances are marked with this symbol. Electrical appliances must be disposed of and recycled in a correct and environmentally friendly manner. You must not dispose of electric appliances with household waste. Disconnect the appliance from the power supply and remove power cord from the appliance.
--	---

Electrical appliances should be returned to designated collection points.

Coolant

The propellant used in the appliance is flammable. It should be utilised pursuant to national regulations in force.